Disk System Introduction

Disk System
Introduction

Chapter 1. Computers 1

What a computer can do . . . A definition of data processing . . . The basic elements of data processing . . . IBM System/3 and data processing . . . Business application for System/3 . . . A data processing job: manual methods versus System/3 methods.

Chapter 2. Data 7

A definition of data as it applies to computers . . . Forms in which System/3 can use data: punched cards and magnetic disks . . . Organizing data into records and files . . . Methods of processing files.

Chapter 3. Programs 13

What a compiler program is and why it is needed . . . Developing a program . . . Writing a program in the RPG II programming language . . . Using the RPG Specifications Sheets . . . Translating and testing programs.

Chapter 4. System/3 Devices 17

IBM 5410 Processing Unit. . . IBM 5203 Printer and optional features . . . IBM 5424 Multi-Function Card Unit. . . IBM 5444 Disk Storage Drive.

Chapter 5. Using System/3 in a Billing Application 23

Order writing . . . Customer and inventory files . . . Description of job steps . . . Processing on System/3 . . . The final result.

Chapter 6. Optional Equipment 31

IBM 5471 Printer-Keyboard . . . IBM 5475 Data Entry Keyboard . . . IBM 5496 Data Recorder . . . IBM 5486 Card Sorter.

Appendix A. System/3 Programs 35

RPG II Compiler . . . Disk Sort and MFCU Sort/Collate . . . Utilities: Alternate Track Assignnment, Alternate Track Rebuild, 96-Column Reproduce and Interpret, and 96-Column List. . . Library Maintenance . . . File Delete . . . File and Volume Display . . . Supervisor . . . Initial Program Loader . . . Scheduler . . . Data Recording . . . Data Verifying.

Appendix B. 96-Column Card 39

Representing alphabetic and numeric characters . . . Character set and punch combinations.

When a computer, such as IBM System/3 Disk System, does a similar job, it also uses input, does processing, and provides output. The minimum disk system includes the following input, output, and processing devices (see Figure 1-1):

- 5410 Processing Unit
- 5424 Multi-Function Card Unit
- 5444 Disk Storage Drive
- 5203 Printer

The Multi-Function Card Unit and Disk Storage Drive are input units that read data into the processing unit. The Multi-Function Card Unit (MFCU) reads data recorded in punched cards. The Disk Storage Drive reads data recorded on magnetic disks. The Processing Unit stores job instructions, performs calculations on input data according to the instructions, and controls operations of the input-output devices. The Printer provides output in the form of printed reports.

The MFCU and the Disk Drive are output as well as input devices. The MFCU can punch data into cards as directed by the processing unit; the disk drive can record data on magnetic disks.

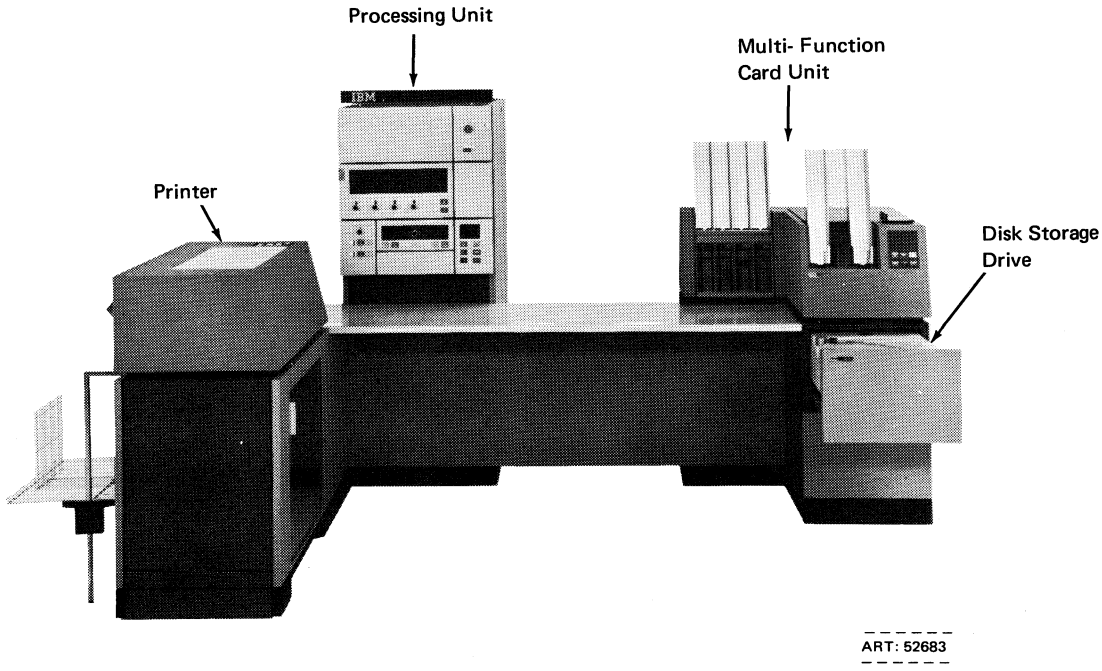

Figure 1-1. IBM System/3 Disk System

System/3 was designed for use in business, and is particularly well-suited to the following business applications:

- Order Writing
- Billing
- Accounts Receivable
- Accounts Payable
- General Ledger
- Inventory Control
- Payroll
- Sales Analysis

To help you understand System/3 and data processing, let's first look at how a clerk might process information for one of the jobs just mentioned—billing. Assume for this job that the clerk works with the following data:

- Customer Orders
- Price Catalogues
- Customer Records
- Accounts Receivable Records
- Inventory Files

The clerk receives a copy of the customer orders after orders are shipped. He uses these documents to prepare bills which he sends to customers. To prepare the bill, he follows this procedure:

1. Looks up, in a price catalogue, the price of each item on the order.

2. Multiplies price by quantity shipped.

3. Adds total price of items to get total amount of bill.

4. Checks customer records to see if any special discounts apply, and adjusts bills accordingly.

5. Types bill.

6. Adjusts accounts-receivable records to show what customer owes.

7. Updates inventory records to show reduced stock.

For each bill he prepares, the clerk follows this same procedure. In computer terms, this procedure is his *program* for doing the job. The customer order is his *input,* the calculating and file updating he does is *processing,* and the results of processing—the bill and the updated records— are his *output.*

As long as the business remains small, the clerk can handle the whole job. As the business grows, however, more and more clerks would be needed and the chances of errors would increase.

System/3 can speed up a billing operation and reduce costly errors. The MFCU can read input data (order information) at high speeds; disk storage can hold many records that can be quickly referenced and updated (price lists, customer records, accounts-receivable records, and inventory files); the processing unit can store and carry out long and complex job instructions (a program) and perform needed calculations; and the printer can print the bills (see Figure 1-2).

Before you can use System/3 for billing or any other data processing job, input data must be prepared in a certain way. In the next chapter we'll look at how data is represented.

In the succeeding chapters, we'll discuss programs, followed by specific descriptions of the devices of System/3. Finally, we will describe in more detail how System/3 would do a billing job.

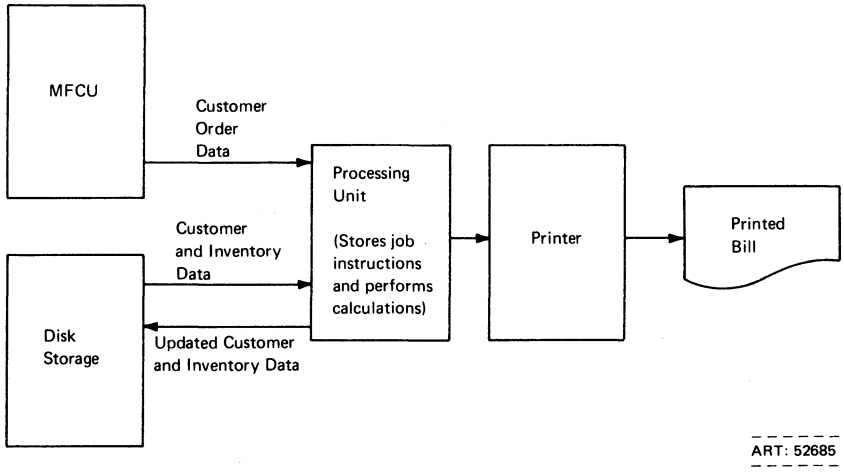

Figure 1-2. Input, Processing, and Output Functions

Data is a collection of facts—numbers, letters, or symbols—that can be processed or produced by a computer. Information on a shipping order, for example, is data, but most computers cannot read data handwritten or printed on documents. Data must be recorded in a form a computer can read. Two forms in which System/3 can read data are punched cards and magnetic disks.

Punched Cards

The card used with System/3 is shown in Figure 2-1. Data can be punched in the lower part of the card and printed on the upper part. The punch area is divided into three parts called *tiers.* Each tier has 32 places where characters of data can be punched. These places are called *card columns.*

The card columns each have six positions in which punches can be placed. Characters are represented by combinations of punches in these positions. Sixty-four different characters can be represented by various punch combinations.

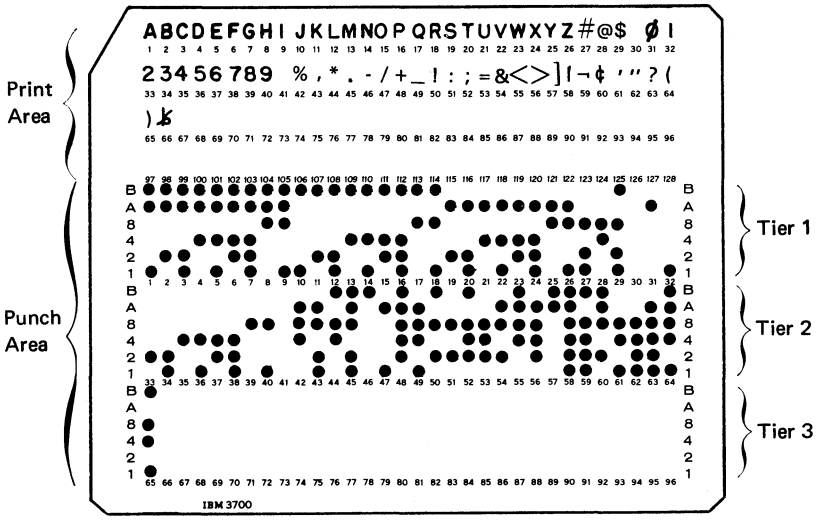

Figure 2-1. 96-Column Card

One card can hold up to 96 characters of data. Figure 2-2 shows how data from a shipping document might look in a punched and printed card.

To punch information, such as this shipping data, into a card, you use the IBM 5496 Data Recorder (Figure 2-3). You sit at the keyboard of the Data Recorder, read the shipping data, then press the appropriate keys, character-by-character. Data recording is similar to typewriting except the result is a punched and printed card. (More information about the Data Recorder is given in Chapter 6.)

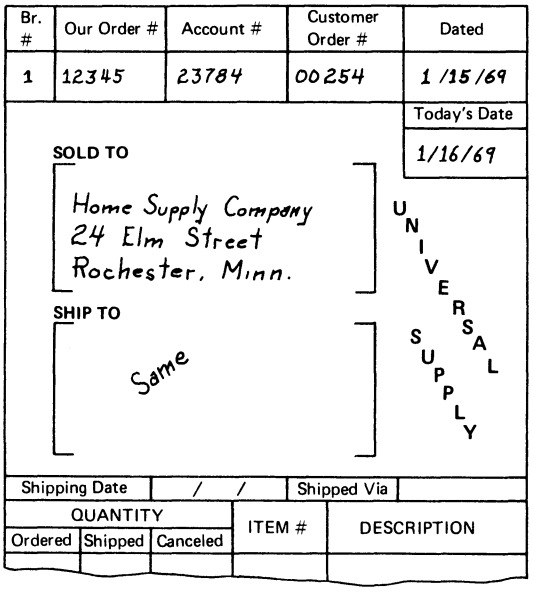

Br. #	Our Order #	Account #	Customer Order #	Dated
1	12345	23784	00254	1/15/69

Today's Date: 1/16/69

SOLD TO

Home Supply Company
24 Elm Street
Rochester, Minn.

SHIP TO

Same

UNIVERSAL SUPPLY

Shipping Date	/ /	Shipped Via	

QUANTITY			ITEM #	DESCRIPTION
Ordered	Shipped	Canceled		

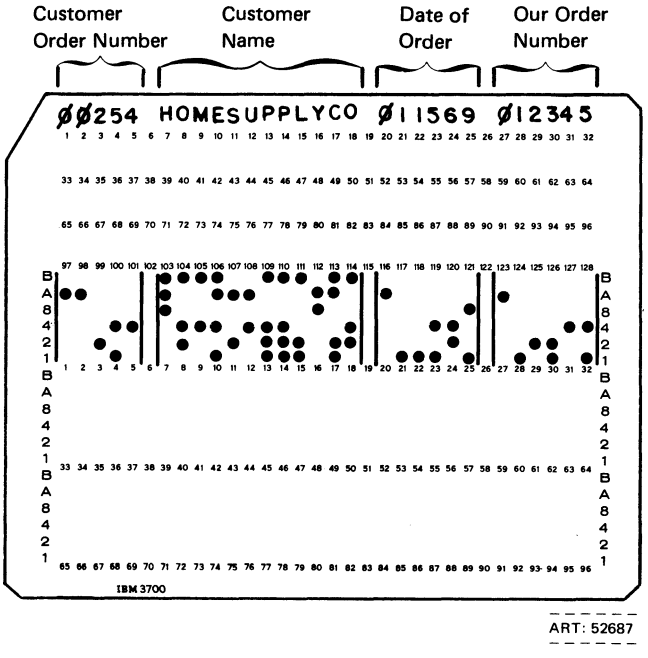

Figure 2-2. Customer Order and Punched Card

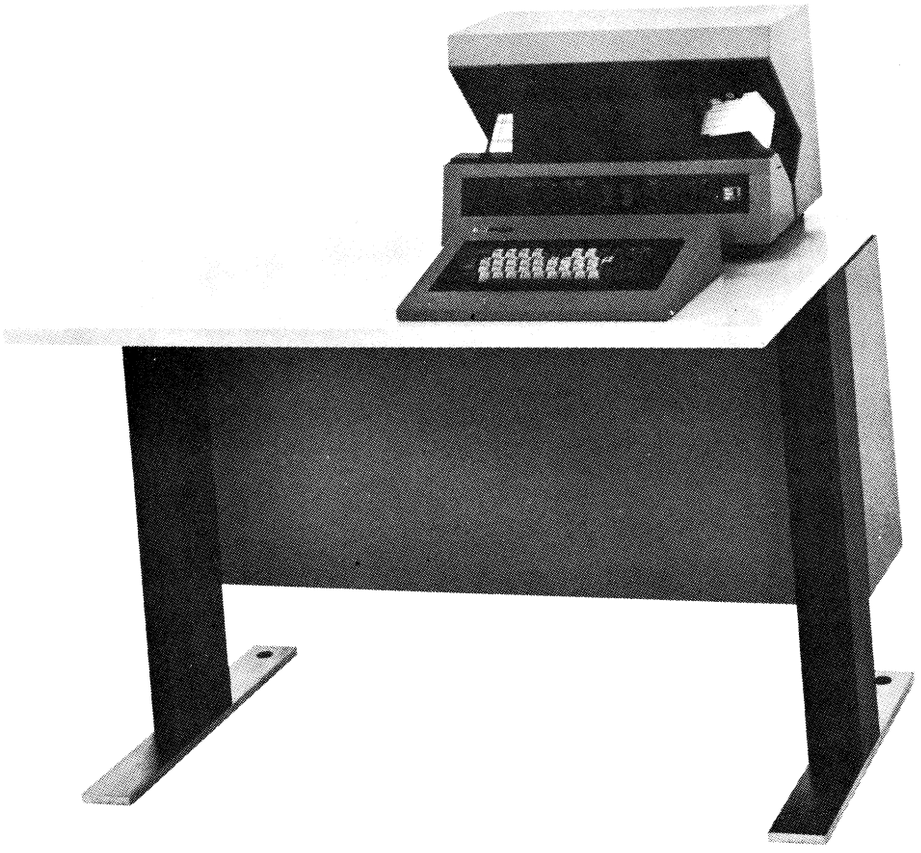

Figure 2-3. IBM 5496 Data Recorder

Magnetic Disks

A disk is a thin, round metal plate coated with magnetic material. Information can be recorded on both sides of the disk in the form of magnetized spots.

The recording surfaces of the disk are divided into many tracks. Each track is divided into equal parts called sectors. Each sector has its own numbered location (address) on the disk. This enables the system to get any information it needs. For example, if an inventory file were stored on disk and the system needed data about a particular item, it could go directly to that item without reading through all the other items that might be recorded ahead of it. Figure 2-4 shows an example of a sector on a disk containing inventory records.

Data on disks can be used over and over and changed as required.

ORGANIZING DATA

Data stored in cards or on disks must be arranged in an orderly fashion so it can be used efficiently by the system. Like most other business information, computer data is organized into records and files. Records are further organized into fields so the computer can locate specific items of information within each record.

Records

A record is any document that contains data about a particular topic. Since computers must be able to locate individual records, each record must be represented on one or more cards or on one or more sectors of a disk.

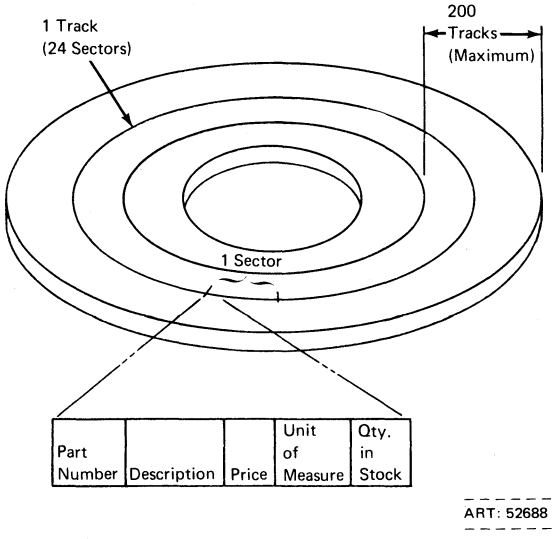

Figure 2-4. Inventory Record on Disk

Fields

Computers must also know where individual items of data are located within a record. An area must be reserved for each item. This area is called a *field.* Figure 2-5 shows fields in a card and a disk record.

A card layout form and a disk layout form are available to help you plan the location of fields in records.

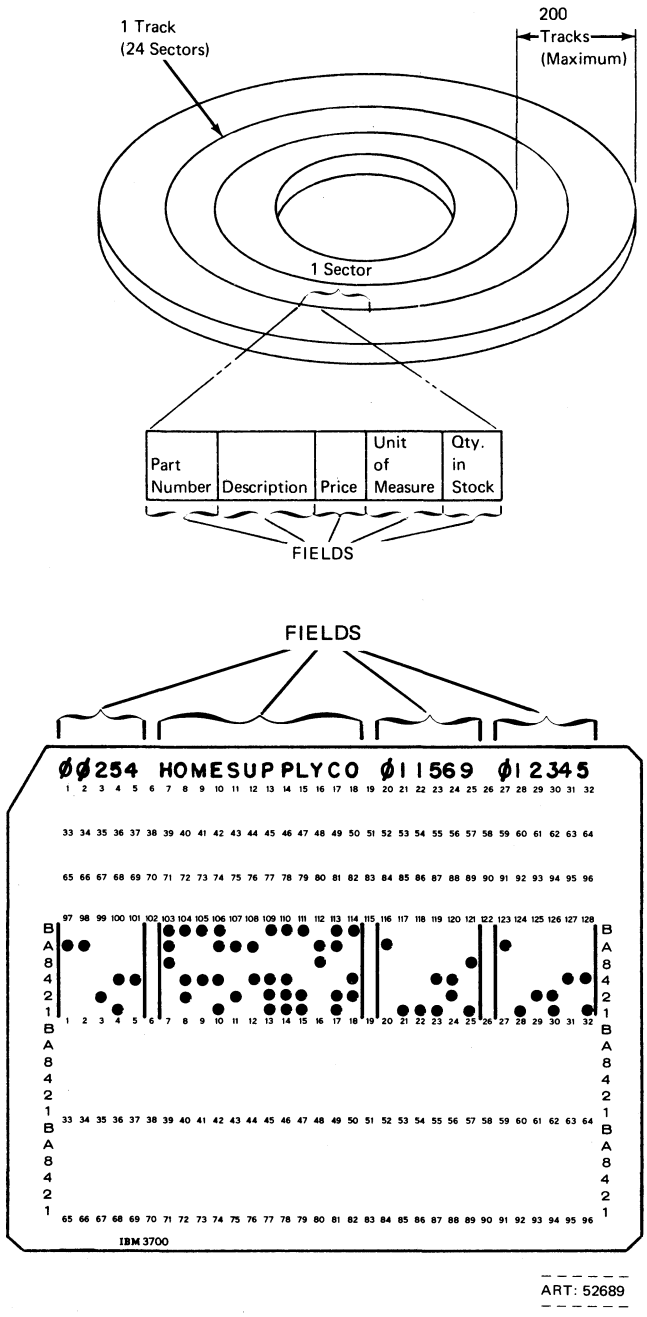

Figure 2-5. Card and Disk Fields

As mentioned in Chapter 1, instructions play an important role in computer processing. They are necessary because a computer cannot think for itself. The set of instructions you write for a job is called a *program.* The process of writing a program is called *programming,* and the person who writes programs is called a *programmer.*

When writing a program for System/3, you use a language called RPG II. RPG II is a simple-to-use programming language in which you describe your job to the computer and what you want the job to do. Like any language, RPG II has certain rules you must follow. The *IBM System/3 Card and Disk System RPG II Fundamentals Programmer's Guide* explains the RPG II language and the rules for using it.

DEVELOPING A PROGRAM

Before writing a program, you must first define the problem. To do this, you analyze the input data and determine the output that is desired. You can use the card layout form and a disk layout form, mentioned in Chapter 2, to define the arrangement of fields in your records. A printer spacing chart is also available to help you define how your printed report is to be arranged. Then you determine what processing steps are required to produce the output information from the input data.

WRITING A PROGRAM

Special sheets are available on which you can write, or code, your RPG II instructions. Five different sheets are used (see Figure 3-1). These sheets enable you to concentrate on one part of your program at a time.

Four of the sheets are designed to handle the basic requirements of a job: input, processing, and output. You use the Input sheet to (1) specify the files you want read, (2) to identify the different kinds of records in each file, and (3) to indicate the location of fields in each record. On the Calculations sheet, you specify the operations you want performed. You use the Output-Format sheet to specify the kind of output you want—printed reports, card records, or disk records—and the format of the output. The File Description sheet is used to define all files used in your program.

The fifth sheet, Extension and Line Counter Specifications, is used only under special circumstances as described in the *IBM System/3 Card and Disk System RPG II Fundamentals Programmer's Guide.*

Because of the many different fields on these sheets, coding may appear to be a difficult job. Few programs, however, require all the sheets, and some may require only a few fields and a few lines on a sheet.

IBM

International Business Machines Corporation

Form X21-9091
Printed in U.S.A.

RPG EXTENSION AND LINE COUNTER SPECIFICATIONS

Date _____

Program _____

Programmer _____

Punching Instruction	Graphic	
	Punch	

Page 1 2

Program Identification 75 76 77 78 79 80

Extension Specifications

IBM

International Business Machines Corporation

Form X21-9092
Printed in U.S.A.

RPG CONTROL CARD AND FILE DESCRIPTION SPECIFICATIONS

Date _____

Program _____

Programmer _____

Punching Instruction	Graphic	
	Punch	

Page 1 2

Program Identification 75 76 77 78 79 80

Control Card Specifications

Sterling

IBM

International Business Machines Corporation

Form X21-9090
Printed in U.S.A.

RPG OUTPUT - FORMAT SPECIFICATIONS

Date _____

Program _____

Programmer _____

Punching Instruction	Graphic	
	Punch	

Page 1 2

Program Identification 75 76 77 78 79 80

IBM

International Business Machines Corporation

Form X21-9093
Printed in U.S.A.

RPG CALCULATION SPECIFICATIONS

Date _____

Program _____

Programmer _____

Punching Instruction	Graphic	
	Punch	

Page 1 2

Program Identification 75 76 77 78 79 80

IBM

International Business Machines Corporation

Form X21-9094
Printed in U.S.A.

RPG INPUT SPECIFICATIONS

Date _____

Program _____

Programmer _____

Punching Instruction	Graphic	
	Punch	

Page 1 2

Program Identification 75 76 77 78 79 80

Line	Form Type	Filename	Sequence	Number (1-N)	Option (O)	Record Identifying Indicator or **	Record Identification Codes 1 Position	1 Not (N)	1 C/Z/D	1 Character	2 Position	2 Not (N)	2 C/Z/D	2 Character	3 Position	3 Not (N)	3 C/Z/D	3 Character	Stacker Select	P = Packed/B = Binary	Field Location From	Field Location To	Decimal Positions	Field Name	Control Level (L1-L9)	Matching Fields or Chaining Fields	Field Record Relation	Field Indicators Plus	Field Indicators Minus	Field Indicators Zero or Blank	Sterling Sign Position
3 4 5	6	7 8 9 10 11 12 13 14	15 16	17	18	19 20	21 22 23 24	25	26	27	28 29 30 31	32	33	34	35 36 37 38	39	40	41	42	43	44 45 46 47	48 49 50 51	52	53 54 55 56 57 58	59 60	61 62	63 64	65 66	67 68	69 70	71 72 73 74
0 1	I																														
0 2	I																														
0 3	I																														
0 4	I																														
0 5	I																														
0 6	I																														
0 7	I																														
0 8	I																														
0 9	I																														
1 0	I																														
1 1	I																														
1 2	I																														
1 3	I																														
1 4	I																														
1 5	I																														
	I																														
	I																														
	I																														
	I																														
	I																														

ART: 52690

Figure 3-1. RPG Specifications Sheets

COMPILING A PROGRAM

After you have coded the specifications on the sheets, the specifications must be punched into cards. Each line from the sheets is punched into a separate card. The deck of cards that results is called a *source program* deck.

Since the source program is not in the form the computer uses to process a job, it must be translated into a machine-understandable program. The RPG II Compiler is a program that translates your source program into machine instructions and produces a new deck of cards called an *object program.* The object program is in a language the computer can use. It is the object program that is read into storage and used to execute your job (see Figure 3-2).

Besides translating your source program, the compiler does several other things for you:

1. It checks your source program for coding errors and notes the errors on a listing.

2. It assigns storage locations in the processing unit for your data and instructions. (More information about storage and the processing unit is given later in the manual.)

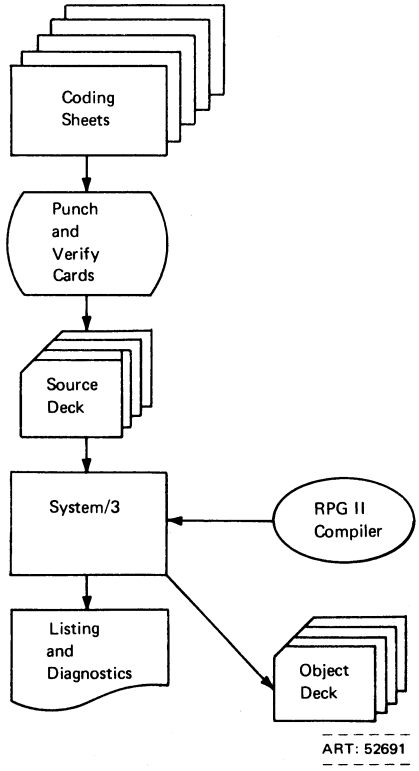

Figure 3-2. Steps in Producing an Object Program

TESTING A PROGRAM

The compiler can check your instructions for coding mistakes (errors in using the RPG II language), but it cannot check for missing instructions or instructions in a wrong sequence. You must do this yourself by testing the program, using sample data. In this way, you can see if your program does, correctly, everything you planned.

RUNNING A PROGRAM

After your object program is tested and corrected, it is ready to be used. All that remains is for you to load the program into storage and process the input data (see Figure 3-3).

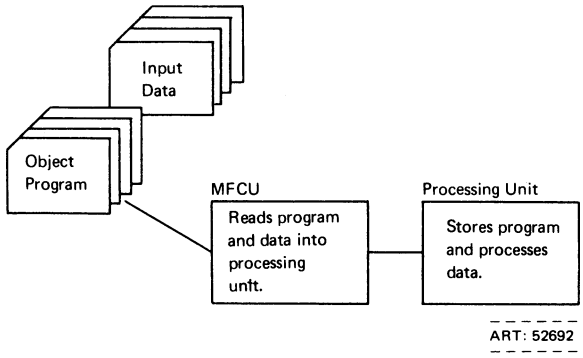

Figure 3-3. Loading a Program and Input Data

IBM System/3, as we said earlier, is composed of several devices. These devices work together to do your data processing. What each device can do and basically how it does it are explained in this chapter.

IBM 5410 PROCESSING UNIT

The IBM 5410 Processing Unit (Figure 4-1) is the main storage and control device for the system. The storage section holds the program instructions for a job and data to be processed during a job. Although information is stored electronically, the idea is similar to a series of numbered mailboxes. Whatever is stored in one of the boxes, or storage positions, can be retrieved by knowing the box number or storage address.

The control section of the processing unit is the decision-maker and the calculator. It carries out the instructions in the storage section. For example, it tells the MFCU to read a card, the Disk Storage Drive to read a record, or the Printer to print a line. If the program calls for calculations—add, subtract, multiply, or divide—they are carried out in the control section.

The control section usually carries out program instructions in the order in which they are stored, beginning with the first instruction. However, instructions do not always have to be executed in sequence. Certain instructions can be placed in the program to cause the control section to carry out a set of instructions located somewhere else in storage, then return to where it left off.

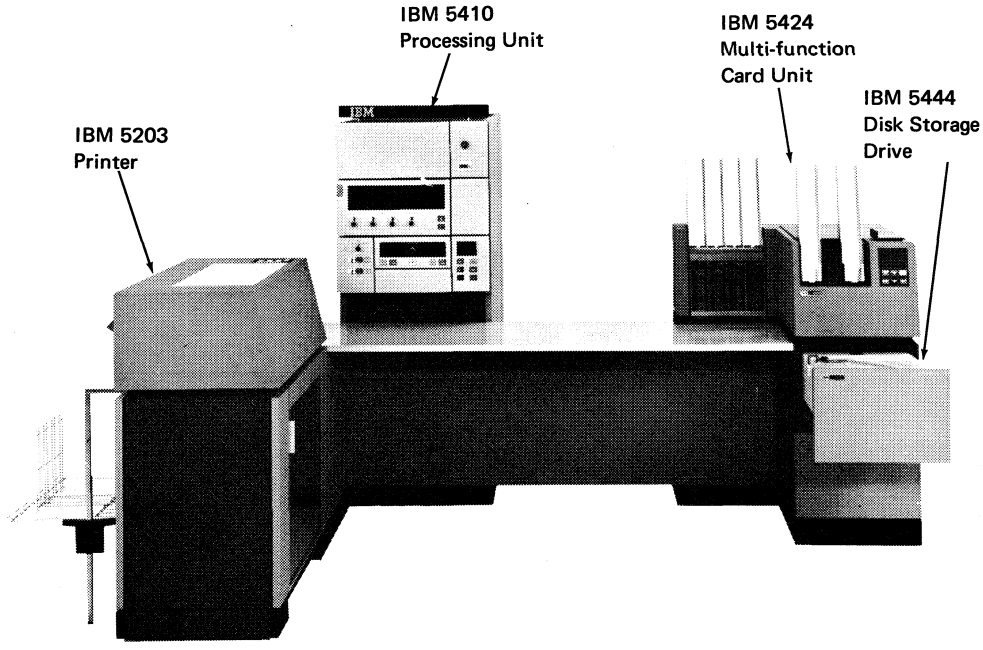

Figure 4-1. IBM System/3 Disk System

The printer can print in 96 positions across a page with a horizontal spacing of ten characters to the inch. Vertical spacing is six or eight lines to the inch as selected by the operator. Spacing between lines and skipping to a predetermined line on a page are controlled by instructions in the program.

The IBM 5203 Printer prints at a speed of 100 or 200 lines a minute, depending upon the model used. It can print an original and multiple carbon copies.

Universal Character Set: Some jobs may require more than a 48-character print set. This optional feature offers character sets ranging from 49 to 120 characters.

Additional Print Positions: This optional feature extends the 96-print positions to 120 or 132.

Dual-Feed Carriage: This optional feature enables the printer to print two, side-by-side forms at the same time. Each form is individually controlled by the program.

IBM 5424 MULTI-FUNCTION CARD UNIT

The IBM 5424 Multi-Function Card Unit (MFCU), shown in Figure 4-1, is both an input and output device. It can read punched-card data into the system and punch output from the system into cards.

In addition to its reading and punching functions, the MFCU has other features that make it unique among card devices. It has two card hoppers, a read station, a punch station, and four stackers (see Figure 4-3). Cards can be fed from either hopper and selected into any stacker according to instructions in the program.

Two separate files can be processed. One can be used as input and the other can be used as output, as in reproducing cards; or both files can be used as input. Data from each file can be combined as necessary during processing.

The MFCU can match records within two files, merge two files, and select records. Sorting can also be done.

Card Reading

The MFCU reads each card serially (three columns at a time, one from each tier). Maximum reading rate is 250 cards a minute or 500 cards a minute, depending upon the MFCU model used.

Reading is accomplished by 18 solar cells. As the card moves through the read station, light passes through the punched holes and is converted into electrical signals by the solar cells.

Primary
Hopper

Figure 4-3. MFCU Card Path

Card Punching

The MFCU punches cards serially (three columns at a time, one from each tier). Card punching'is done at a maximum rate of 60 cards a minute or 120 cards a minute, depending upon the MFCU model used. As a card moves through the punch station, the stored program activates appropriate punch magnets, causing data to be punched.

Card Printing

At the print station, data can be printed at the top of the card. Up to four lines can be printed, under program control. Each line has 32 print positions.

Maximum printing rate, for up to three rows of printing (top three rows), is 60 cards a minute or 120 cards a minute, depending upon the MFCU model used. The fourth row of printing is also done under program control, but with a reduction in printing speed.

MFCU Control Panel

A control panel at the right of the primary hopper provides the lights and switches necessary for operator control of start, stop, and card runout.

IBM 5444 DISK STORAGE DRIVE

The IBM 5444 Disk Storage Drive is in a drawer under the MFCU. The basic unit consists of one drive, two disks, and an access mechanism (see Figure 4-4).

The lower disk is mounted permanently on the drive. The upper disk is removable and can be replaced with other disks. To protect the disk surfaces from damage, the upper disk is completely enclosed in a cartridge. This also makes it easy to handle and store.

The access mechanism on the disk drive has four read/write head, one for each surface of the two disks. When activated, the access mechanism moves the heads back and forth across the surfaces of the disks to any designated position. The heads move together. When one is positioned at a certain place on one disk surface, the others are positioned at the same relative positions on the other three disk surfaces.

Depending upon the model, the IBM 5444 can record data on 100 or 200 cylinders on each disk. (Corresponding tracks from each side of the same disk are called cylinders.)

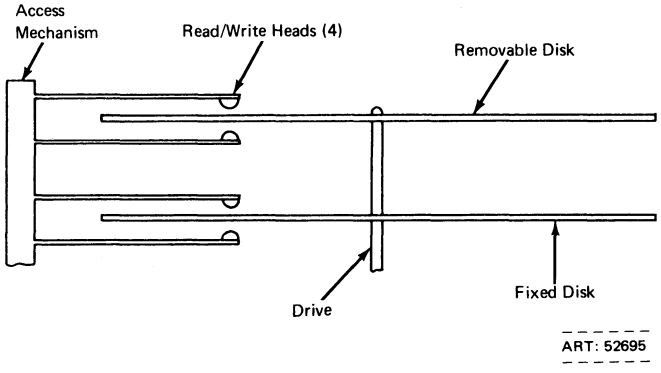

Figure 4-4. Disk Storage Drive

To show how System/3 performs data processing let's assume that a company called the Universal Supply Company uses System/3 to do its billing. This company has a central warehouse and several branch locations. It stocks and sells 12,000 different items. All the company's billing is done at the central location.

The billing process involves order writing, preparation of a bill, and several related applications: accounts receivable, inventory control, and sales analysis.

ORDER WRITING

For every order received, whether by phone or letter, a clerk writes the information on a standard order form (see Figure 5-1). After he writes the order, he forwards it to a shipping clerk.

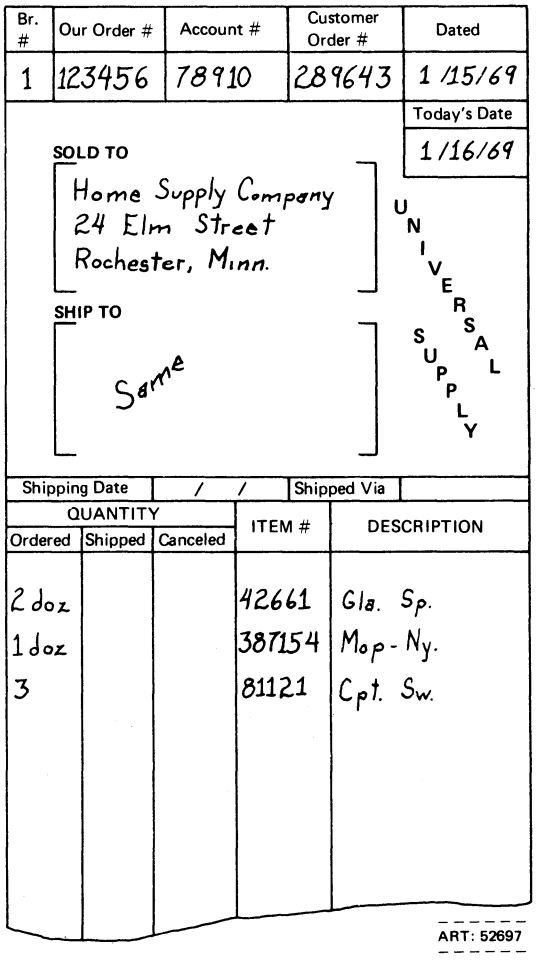

Br. #	Our Order #	Account #	Customer Order #	Dated
1	123456	78910	289643	1/15/69

Today's Date: 1/16/69

SOLD TO
Home Supply Company
24 Elm Street
Rochester, Minn.

SHIP TO
Same

UNIVERSAL SUPPLY

Shipping Date	/ /	Shipped Via	

QUANTITY			ITEM #	DESCRIPTION
Ordered	Shipped	Canceled		
2 doz			42661	Gla. Sp.
1 doz			387154	Mop-Ny.
3			81121	Cpt. Sw.

ART: 52697

Figure 5-1. Order Form

Billing Copy of Customer Order

The billing copy of the customer order (Figure 5-2) contains the basic information used in preparing the bill.

Customer File

The customer file contains such items as customer account number, name and address, accounts receivable, and sales information. The customer file is kept on disk. Figure 5-3 shows the type of data contained in the customer records.

Inventory File

The inventory file on disk contains such data as part numbers and descriptions, information about vendors from whom the items are purchased, stock on hand in each warehouse, and price. Figure 5-4 shows the arrangement of the inventory records.

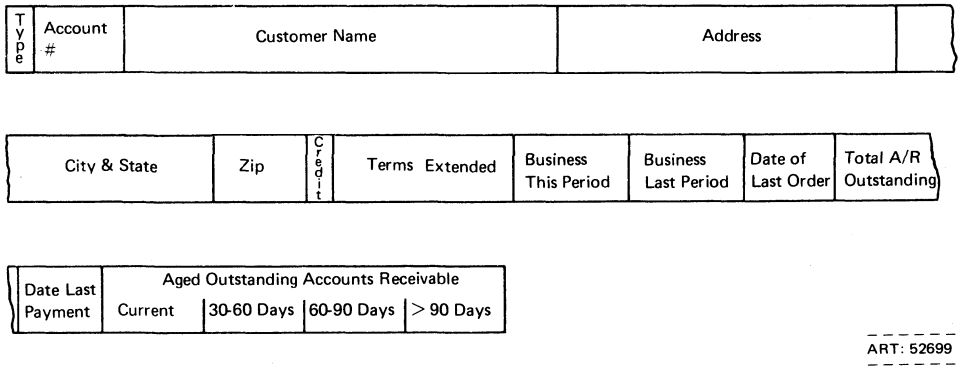

Figure 5-3. Layout of Customer Records on Disk

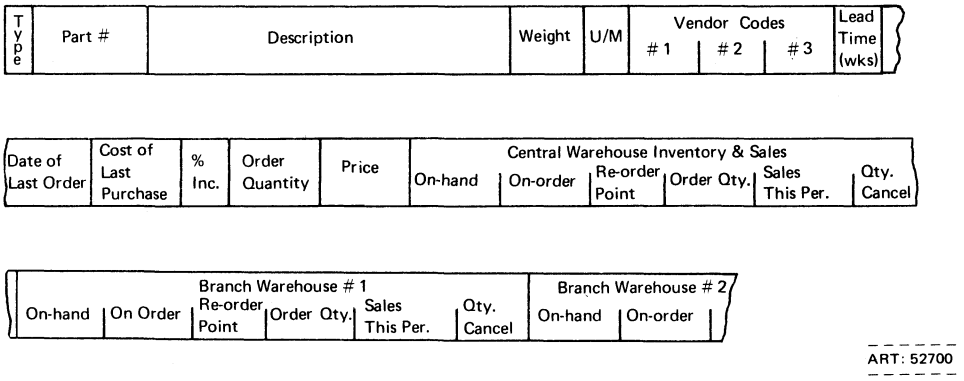

Figure 5-4. Layout of Inventory Records on Disk

JOB STEPS

The steps involved in this job are shown in Figure 5-5. When the filled orders are received in the billing department, a clerk logs them in. He keeps a record of the number of orders received, and perhaps the number of items in each order. This is a control to ensure accuracy throughout the billing process. The number of invoices produced is checked against the number of orders received for billing.

After the orders are logged in, a clerk records the information into cards. Using the IBM 5496 Data Recorder, he creates one card (header card) with general information about the order and one or more cards (item cards) with information about the items ordered (see Figure 5-6). The Data Recorder is also used to verify the correctness of the punching.

At this point, the clerk is ready to process the information. He first loads the object program, written in the RPG II language, as described in Chapter 3. System/3 is now ready to read the input cards and disk files according to the program instructions.

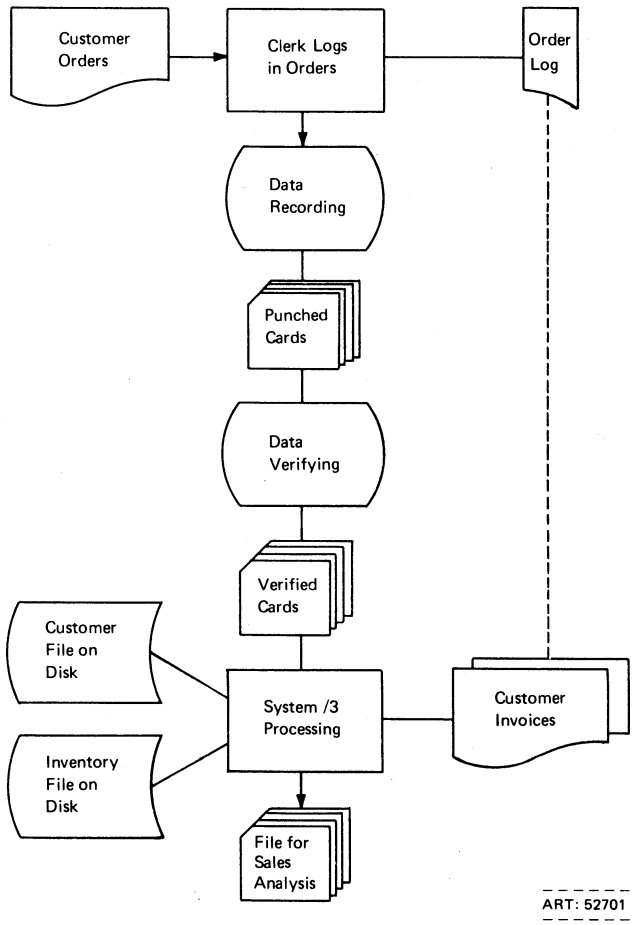

Figure 5-5. Job Steps: Billing Application

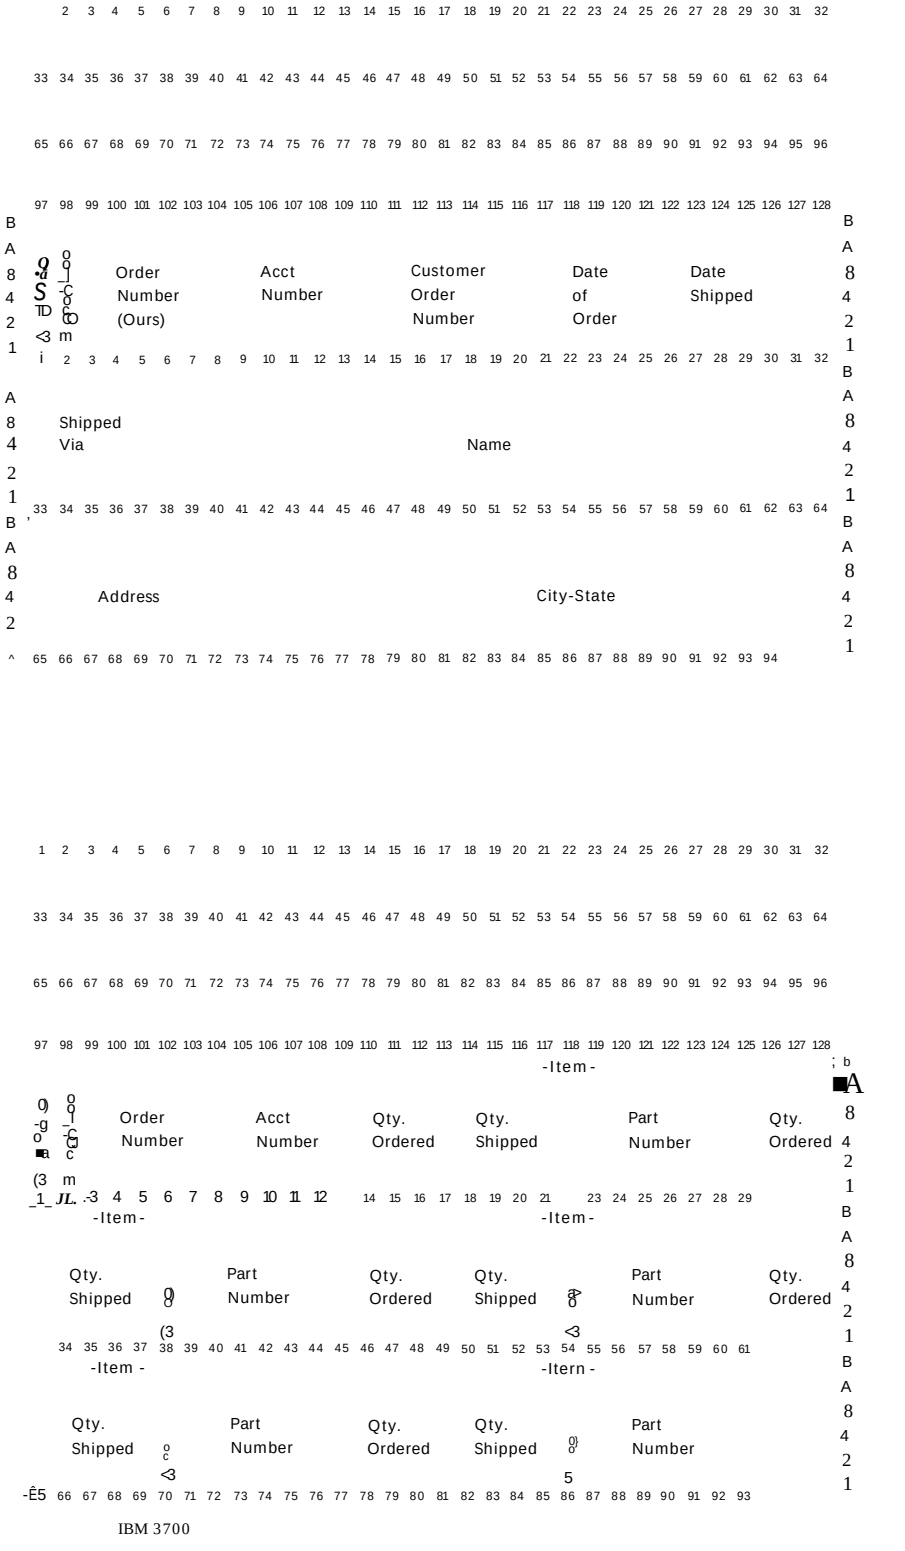

Figure 5-6. Fields in Header and Item Cards

PROCESSING

To print each invoice and update the customer and inventory records, the following processing steps are performed by the system under control of the program:

1. Read header card.
2. Get customer record from disk.
3. Print heading information on invoice.
4. Read item from item card.
5. Get item record from inventory file on disk.
6. Calculate item price.
7. Print item and price on invoice.
8. Update inventory record on disk.
9. Repeat steps 4 through 8 for each item on item cards.
10. Compute tax and total for all items.
11. Print tax and total on invoice.
12. Update accounts receivable and sales records on disk.

OUTPUT

Output from the system is a printed invoice (Figure 5-7) and updated customer and inventory records.

After invoicing has been completed and customer and inventory records updated, other reports can be printed using the order cards and disk records:

- Stock Status
- Daily Sales
- Sales Analysis by Item and Customer

Account # 78910	Terms: 10 NET 30	Invoice Date 02/20/69	Invoice # 14638

UNIVERSAL INDUSTRIAL SUPPLY

SOLD TO:

HOME SUPPLY COMPANY
24 ELM STREET
ROCHESTER MINN
55901

SHIPPED TO:

SAME

Your Order # 289643	Dated 01/15/69	Was Shipped 01/17/69	Shipped Via ACME F.F.

Ordered	Shipped	B/O or Cancel *	Item #	Description	U/M	Price		Extension	
24	24		42661	GLASS SPRAY	EA		55	13	20
12	8	4*	387154	NYLON MOP	EA	2	50	20	00
3	2	1	81121	CARPET SWEEPER	EA	11	20	22	40
				TOTAL				55	60

ART: 52703

Figure 5-7. Printed Invoice

SUMMARY

The disk storage capabilities of the system make it possible to do a billing job and all its related functions at one time. You can process rush orders as they are received or accumulate orders and process them all at once.

Because of the high speed at which the system operates, a large volume of orders can be processed quickly. Inventory records can be updated as each order is processed, making inventory easier to control. Timely and accurate reports on sales and profits can be easily and quickly obtained.

This chapter describes additional devices available for use with the IBM System/3 Disk System. These devices expand the basic capabilities of the system.

IBM 5471 PRINTER-KEYBOARD

The IBM 5471 Printer-Keyboard can be installed on the system (see Figure 6-1). It consists of an IBM SELECTRIC® Typewriter connected to the system processing unit. With the printer-keyboard, the operator can:

1. Request information from a disk file on the Disk Storage Drive.
2. Print out requested information.
3. Enter data directly into the system.
4. Use the printer-keyboard as a second printer for low-volume output.

ART: 52704

Figure 6-1. IBM 5471 Printer-Keyboard

The 5471 Printer-Keyboard has a 44-character print element. It can print lines up to 125 characters long at an approximate rate of 15 characters a second. Multiple copies can be printed.

IBM 5475 DATA ENTRY KEYBOARD

The IBM 5475 Data Entry Keyboard (Figure 6-2) provides program-controlled data recording, online (under direct control of the processing unit). By means of the keyboard and the IBM Data Recording and Data Verifying programs (described in Appendix A), the MFCU can be used to punch and verify cards.

Online data recording uses a buffered input technique. This means that the entire contents of a card is keyed into system storage before any punching is done. This gives the operator a chance to correct mistakes by erasing and rekeying the data.

Program control cards can be used to control automatic functions, such as skipping or duplicating, on a card-field basis. Two program levels are available for storing information from two different control cards. More information on control cards is given in the *IBM System/3 Data Recording and Data Verifying Programs Operator's Guide.*

Figure 6-2. IBM 5475 Data Entry Keyboard

ART: 51733

IBM 5496 DATA RECORDER

The IBM 5496 Data Recorder (Figure 6-3), provides operator-controlled card punching, printing, and verifying. The data recorder has a 64-character keyboard, a card hopper, a punch station, a read station, a print station, and a stacker. Reading, punching, and printing rates are 60 columns per second.

The data recorder features a buffered input-output area; that is, data is collected in a key-entry storage area and is not punched until all data for a card has been keyed. This allows the operator to erase and rekey any data he wishes. One character, one field, or a whole card record can be erased and rekeyed.

Overlapping of punching and keying functions increases the rate at which data can be recorded. While one card is being punched, data for the next card can be keyed.

ART: 51802

Figure 6-3. IBM 5496 Data Recorder

Prepunched program cards can be read into storage at the start of a job to control automatic functions, such as skipping or duplicating, on a card-field basis. Up to four program cards can be stored. The operator can select any of the four program levels while punching.

The data recorder can also be used as a card verifier. This permits immediate error correction when verifying cards. For additional information, refer to the *IBM 5496 Data Recorder Operator's Guide.*

IBM 5486 CARD SORTER

The IBM 5486 Card Sorter (Figure 6-4) arranges cards in alphabetic or numeric sequence. The sorter has a hopper, a read station, and six stackers. Speeds of 1000 or 1500 cards per minute are available. For additional information about the card sorter, refer to the *IBM 5486 Card Sorter Operator's Guide.*

ART: 51735

Figure 6-4. IBM 5486 Card Sorter

This section briefly describes the programs available for use with IBM System/3. It has been included for persons already familiar with computers and programming. Additional information about these programs is contained in *IBM System/3 Disk System Reference Manual,* Form C21-7512.

System/3 programs can be divided into three groups: processing programs, service programs, and control programs.

PROCESSING PROGRAMS

RPG II Compiler

The RPG II Compiler program translates source programs, written in the RPG II language, and produces object programs in machine language. It also produces source program listings that are used for checking the accuracy of source program coding.

Sort

Two sort programs are available: Disk Sort and MFCU Sort/Collate.

Disk Sort: Arranges disk records in any desired order.

MFCU Sort/Collate: Arranges cards in any order, combines two card files, compares two card files for matching records, and selects cards from a file.

Utilities

Utility programs perform standard input/output functions, such as copying files. They also provide maintenance of alternate tracks and initialization of disks.

Alternate Track Assignment: Relocates the contents of an entire track to an alternate track if a track becomes defective.

Alternate Track Rebuild: Permits the operator to correct erroneous data that cannot be transferred from a defective track to an alternate track by the Alternate Track Assignment program.

96-Column Reproduce and Interpret: Reproduces decks of punched cards or interprets (prints) data on previously-punched cards. Four options are provided in the program:

1. Reproduce only
2. Reproduce and interpret
3. Reformat and interpret
4. Reformat, reproduce, and interpret

96-Column List: Prints data, column-by-column, from 96-column cards.

SERVICE PROGRAMS

[illegible] pro rams on a [illegible] needed The [illegible]

e t

T e ile el te [illegible] r needed, a ing t area [illegible]

il an la

The il a d o u e s lay ro ram enables t e user to nt t e u e T e o ontents C) T C is an inde d scri i eac le n a i is program can a o r nt out ide ation or a one of the iles on a disk

			Numeric Characters									
			0	1	2	3	4	5	6	7	8	9
Punch Positions	Zone	B										
		A	A									
	Digit	8									8	8
		4					4	4	4	4		
		2			2	2			2	2		
		1		1		1		1		1		1

			Alphabetic Characters																									
			A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z
Punch Positions	Zone	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B								
		A	A	A	A	A	A	A	A	A	A										A	A	A	A	A	A	A	A
	Digit	8								8	8								8	8							8	8
		4				4	4	4	4						4	4	4	4					4	4	4	4		
		2		2	2			2	2				2	2			2	2			2	2			2	2		
		1	1		1		1		1		1	1		1		1		1		1		1		1		1		1

			Special Characters																											
			}	¢	.	<	(	+	|	!	$	*	)	;	¬	-	/	&	,	%	–	>	?	:	#	@	'	=	"	ø
Punch Positions	Zone	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B														
		A	A	A	A	A	A	A	A								A	A	A	A	A	A	A							
	Digit	8		8	8	8	8	8	8	8	8	8	8	8	8			8	8	8	8	8	8	8	8	8	8	8	8	
		4				4	4	4	4			4	4	4	4					4	4	4	4			4	4	4	4	
		2		2	2			2	2	2	2			2	2			2	2			2	2	2	2			2	2	
		1			1		1		1		1		1		1		1		1		1		1		1		1		1	

ART: 51708

Figure B-3. Punch Combinations

READER'S COMMENT FORM

GC21-7510-0

Your answers to the questions on this sheet will help us produce better manuals for your use. If any of your answers require comments, or if you have additional information you think would be helpful, please use the space provided. All comments and suggestions become the property of IBM.

	Yes	No
1. Is the manual easy to read?		
2. Is any of the information unclear?		
3. Is additional information needed?		
4. Is any of the information unnecessary?		
5. Did you read the Preface?		
6. Did you use the Table of Contents?		
7. Did you use the Index?*		
8. Did you take the tests?*		

* Not included in all manuals

9. How did you use the manual:

Instructor in a class _____
Student in a class _____
Reference material _____
Self-Training _____
Other (Explain) _____

Have you had previous computer or programming training? _____

What is your present job? _____

What business is your company engaged in? _____

COMMENTS

● Thank you for your cooperation. No postage necessary if mailed in the U.S.A.

GC21-7510-0

YOUR COMMENTS, PLEASE. . .

Your answers to the questions on the back of this form, together with your comments, will help us produce better publications for your use. Each reply will be carefully reviewed by the persons responsible for writing and publishing this material. All comments and suggestions become the property of IBM.

Note: Please direct any requests for copies of publications, or for assistance in using your IBM system, to your IBM representative or to the IBM branch office serving your locality.

Cut Along Line

Fold Fold

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 40 ARMONK, N.Y.

POSTAGE WILL BE PAID BY ADDRESSEE:

IBM Corporation
Systems Development Division
Development Laboratory
Rochester, Minnesota 55901

Attention: Programming Publications, Dept. 425

Fold Fold

IBM System/3 Printed in U.S.A. GC21-7510-0

IBM®

IBM System/3. Printed in U.S.A. GC21-7510-0

IBM